

248 Cloverdale Rd.
Jacksonville, AR 72076
501-982-0581

Street Address 200 Meadows Dr.

Street Address 200
Legal Description 200 Meadows Dr. lot 46

Single Family Residence ☒ *Multi-family Residential ☐ Units ☐

*Commercial Installation _____ Description: New Connection

Water Meter (s) Size 78

- * Commercial installations, and multi-family installations of more than 4 dwelling units must be accompanied by a site plan showing the proposed building sewer.

Sewer line installation by D.L. Creek Plumbing.

Address _____

General Contractor Euro Homes, Inc. / Gene Griffin

Address 6514 W. Main St. Jacksonville, AR 72076

In consideration of the granting of this permit the undersigned agrees:

1. To accept and abide by all provisions of the Jacksonville Wastewater Utility.
2. To maintain the building sewer at no expense to the Utility, to the point of connection with the public sewer main.
3. To notify the utility's inspector when the building sewer is ready for inspection and connection to the public sewer main, but before any portion of the work is covered.

Fees: Connection Fee \$ 75.00 4/15/09 Receipt No. 8281

Tap Charge \$ _____ Receipt No. _____

Inspection Fee \$ _____ Receipt No. _____

Street Cut \$ _____ Receipt No. _____

APPLICANT


Signed X Gene Smith, President

- ☐ Plumbing Contractor
☒ General Contract
☐ Owner (Address _____)

APPROVED
Jacksonville Wastewater Utility

By: Sina Naeft Date: 6-15-09

close for
T.S.
Paul &
Bob




HYDRAMATIC

GPM: _____ TDH: _____

Conditions of Service:

The curves reflect maximum performance characteristics without exceeding full load (Nameplate) horsepower. All pumps have a service factor of 1.2. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F. and 1200 feet site elevation.

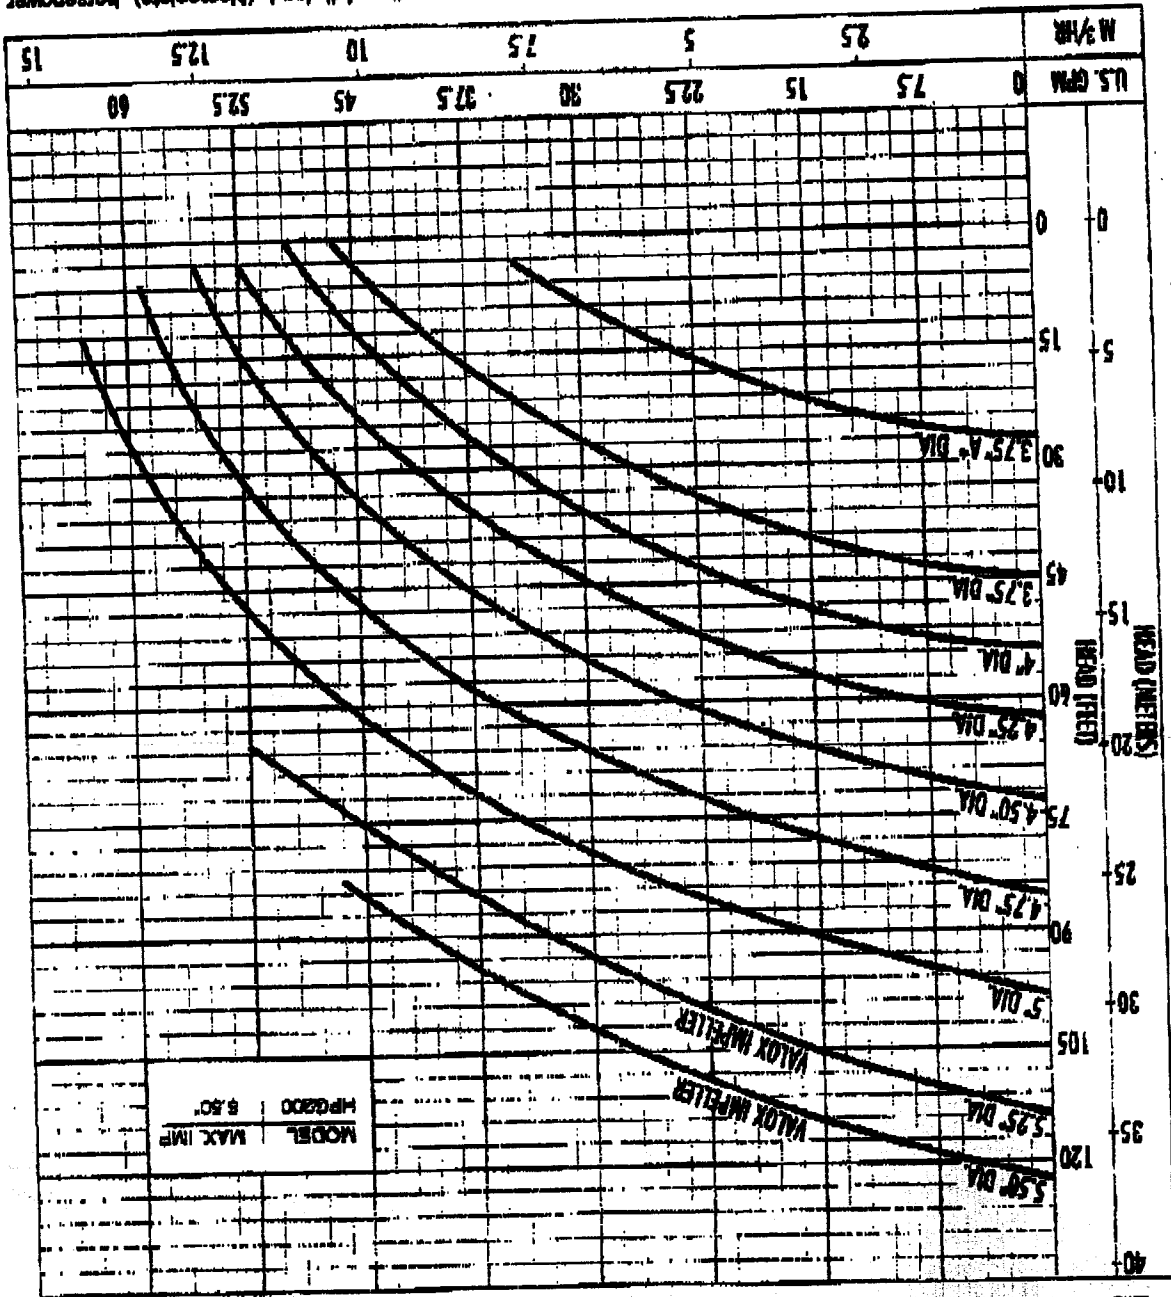


Performance Curve

RPM: 3450 Discharge: 1-1/4"

HPG

Section GRINDER Page 101
 Dated MAY 2000
 Supersedes JUNE 1999



Technical Data:	
POWER COORD TYPE	50W/50W-A WATER RESISTANT 500V, 60°C
MATERIALS OF CONSTRUCTION	MOTOR HOUSING
	CAST IRON ASTM A-48 CLASS 30
	CASING
	CAST IRON ASTM A-48 CLASS 30
	IMPELLER
	RED BRASS #55-5-5-5 ASTM B594-B36V/ALOX 420 SEC WITH BRONZE INSERT
CUTTERS	Stationary:
	Upper (Axial): 440C STAINLESS STEEL HARDENED TO 55-60 ROCKWELL C
MOTOR SHAFT	Lower (Radial): 440C STAINLESS STEEL HARDENED TO 55-60 ROCKWELL C
	416 STAINLESS STEEL
HARDWARE	300 SERIES STAINLESS STEEL
O-RINGS	BUNA N
MECHANICAL SEALS	
Standard: UPPER CARBON/CERAMIC/BUNA-N, TYPE 21	
Optional: LOWER TUNGSTEN CARBIDE/TUNGSTEN CARBIDE/BUNA-N, TYPE 21	
UPPER BEARING	(RADIAL) SINGLE ROW BALL 5203
LOWER BEARING	(THRUST) SINGLE ROW BALL 5303
MIN. B-10 BEARING LIFE	50,000 Hrs

HEAT SENSOR	Open: 257°F MAX./239°F MIN. Closed: 194°F MAX./149°F MIN.
OIL FLASH POINT	390°F
MAXIMUM STATOR	266°F
MAXIMUM LIQUID	140°F

Temperature:

PAINT	PAINTED AFTER ASSEMBLY, DARK GREEN, ENAMEL, ONE COAT, AIR DRIED
CABLE LENGTH	15' STANDARD
IMPELLER TYPE	SEMI-OPEN 5 VANE
DISCHARGE SIZE	1 1/2" NPT

Physical Data:

MODEL HP6 - Standard Grinder Pumps



Section: GRINDER Page 401
Dated: DECEMBER 2002
Supersedes: JULY 2000

HYDRAMATIC



HP	200	230	250	280	300	350	400	450	500	575
HP	200	230	250	280	300	350	400	450	500	575
HP	200	230	250	280	300	350	400	450	500	575
HP	200	230	250	280	300	350	400	450	500	575
HP	200	230	250	280	300	350	400	450	500	575
HP	200	230	250	280	300	350	400	450	500	575
HP	200	230	250	280	300	350	400	450	500	575
HP	200	230	250	280	300	350	400	450	500	575
HP	200	230	250	280	300	350	400	450	500	575
HP	200	230	250	280	300	350	400	450	500	575

ELECTRICAL RATINGS				VOLTAGE TOLERANCE			
SEAL FAIL				±10%			
HEAT SENSOR				300VAC 6mA			
24VDC 5AMPS				250VAC 5AMPS			
115VAC 5AMPS				250VAC 5AMPS			
BI-METALLIC, TEMPERATURE SENSITIVE DISC, SIZED TO OPEN AT 120°C AND AUTOMATICALLY RESET @ 30-35°C DIFFERENTIAL, ONE IN SINGLE PHASE, TWO IN THREE PHASE							
MOTOR PROTECTION							
MAXIMUM STATOR TEMPERATURE				130°C			
STATOR WINDING CLASS				F			
GENERAL INSULATION CLASS				F			
MOTOR DESIGN TYPE				B (DOL)			
MOTOR TYPE				ENCLOSED, COOLING INDUCTION			
R.P.M.							

Model 100 Standard Grinders

Section GRINDER Page 301
 Dated JANUARY 2001
 Supersedes OCTOBER 1999



Electrical Data

